


# SP-VGL-162

## BULK WIRE

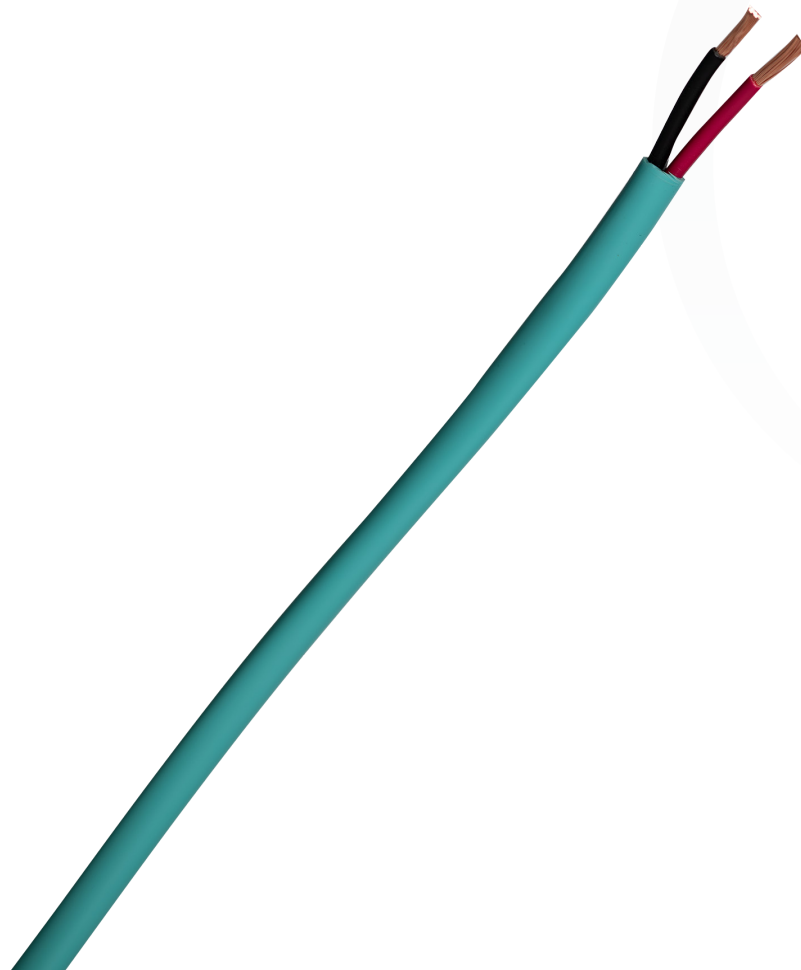

### Features:

- Compatible with Control4® Vibrant Linear Lighting
- Each color-coded jacket allows for easy troubleshooting and maintenance
- Available for pickup at Snap One Partner Stores
- All purchases eligible for Partner benefits

### Applicable Standards:

- UL Listed
- Temperature: -20°C to 75°C

	VLG-162
<b>Conductor Material</b>	Stranded Oxygen Free Bare Copper
<b>Wire Gauge</b>	16AWG
<b>Number of Conductors</b>	2
<b>Stranding</b>	65 Strands * 0.16mm diameter +/- .001
<b>Conductor Jacket Material</b>	PVC (Polyvinyl Chloride)
<b>Nominal Jacket Thickness (Conductors)</b>	0.55mm +/- 0.15
<b>Outer Jacket Material</b>	
<b>Outer Jacket Thickness/ Diameter</b>	
<b>Outer Shield</b>	No
<b>Tape (Shield)</b>	No
<b>Drain Wire (Shield)</b>	No
<b>Rip Cord</b>	Yes
<b>Color</b>	"Interior Jacket Colors (Red / Black) Exterior Jacket Color (Vibrant Green/Blue #66D7D1) "
<b>Length</b>	1000ft
<b>Sealant</b>	N/A
<b>Sealant Temp</b>	N/A
<b>Compatibility</b>	
<b>Waterproof</b>	No
<b>Max Temp Rating</b>	75C
<b>Installation Temp.</b>	-30C to 60C
<b>Operating Temp</b>	-30C to 60C


	VLG-162
<b>Voltage</b>	600V Max (80V LV Nominal)
<b>Normal Conductor DCR</b>	x
<b>Normal Capacitance (Conductor to Conductor)</b>	x
<b>Normal Capacitance (Conductor to Other) [Conductors + Shield]</b>	x
<b>Normal Characteristic Impedence</b>	x
<b>High Frequency (Nominal/ Typical)</b>	x

	VLG-162
<b>Tier 1 and Tier 2 Certifications</b>	North America, Europe, New Zealand, Australia, APAC
<b>UL or ETL certification</b>	CL3/CM Rating, UL Listed, FT4 Rated, CPR
<b>IP Rating</b>	N
<b>RoHS 2 / 3</b>	Y
<b>Other Restricted Substances</b>	Y

	VLG-162
<b>Packaging</b>	Yes: Rust prevention hardware
<b>Packaging</b>	N/A
<b>Packaging</b>	N/A

# SP-VGL-186

## BULK WIRE

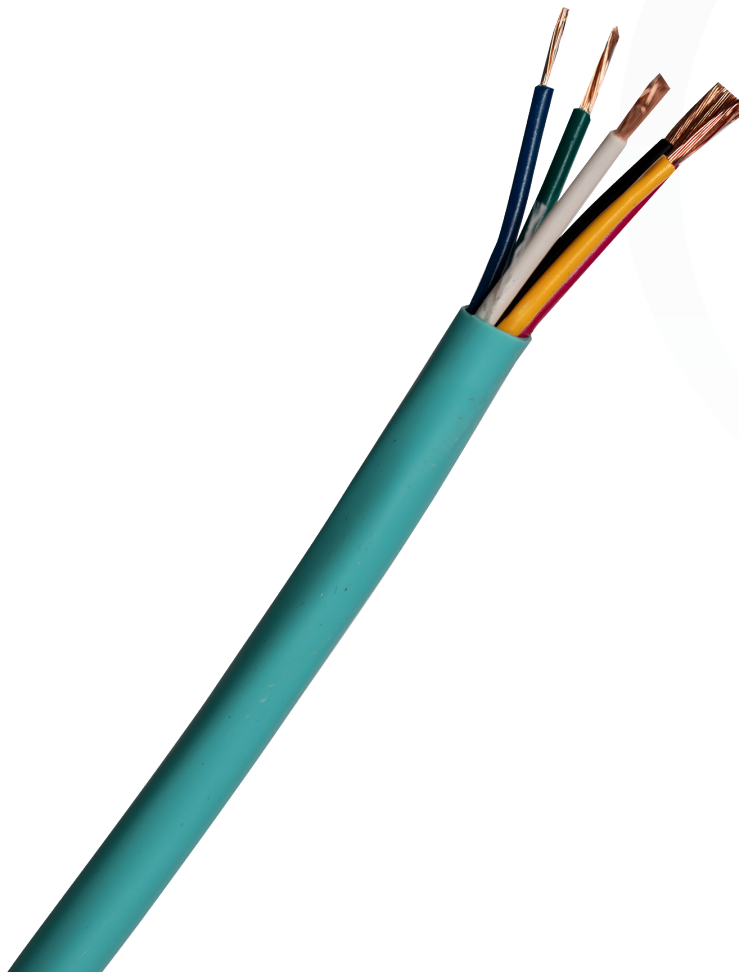

### Features:

- Compatible with Control4® Vibrant Linear Lighting
- Each color-coded jacket allows for easy troubleshooting and maintenance
- Available for pickup at Snap One Partner Stores
- All purchases eligible for Partner benefits

### Applicable Standards:

- UL Listed
- Temperature: -20°C to 75°C

	SP-VLG-186-1000
<b>Conductor Material</b>	Stranded Oxygen Free Bare Copper
<b>Wire Gauge</b>	18AWG
<b>Number of Conductors</b>	6
<b>Stranding</b>	42 Strands * 0.16mm diameter +/- .008
<b>Conductor Jacket Material</b>	PVC (Polyvinyl Chloride)
<b>Nominal Jacket Thickness (Conductors)</b>	0.5mm +/- 0.1 mm
<b>Outer Jacket Material</b>	
<b>Outer Jacket Thickness/ Diameter</b>	
<b>Outer Shield</b>	No
<b>Tape (Shield)</b>	No
<b>Drain Wire (Shield)</b>	No
<b>Rip Cord</b>	Yes
<b>Color</b>	"Interior Jacket Colors (Red, Black, Yellow, White, Blue, Green) Exterior Jacket Color (Vibrant Green/Blue #66D7D1) "
<b>Length</b>	1000ft
<b>Sealant</b>	N/A
<b>Sealant Temp</b>	N/A
<b>Compatibility</b>	
<b>Waterproof</b>	No
<b>Max Temp Rating</b>	75C
<b>Installation Temp.</b>	-30C to 60C
<b>Operating Temp</b>	-30C to 60C


	SP-VLG-186-1000
<b>Voltage</b>	600V Max (80V LV Nominal)
<b>Normal Conductor DCR</b>	x
<b>Normal Capacitance (Conductor to Conductor)</b>	x
<b>Normal Capacitance (Conductor to Other) [Conductors + Shield]</b>	x
<b>Normal Characteristic Impedence</b>	x
<b>High Frequency (Nominal/ Typical)</b>	x

	SP-VLG-186-1000
<b>Tier 1 and Tier 2 Certifications</b>	North America, Europe, New Zealand, Australia, APAC
<b>UL or ETL certification</b>	CL3/CM Rating, UL Listed, FT4 Rated, CPR
<b>IP Rating</b>	N
<b>RoHS 2 / 3</b>	Y
<b>Other Restricted Substances</b>	Y

	SP-VLG-186-1000
<b>Packaging</b>	Yes: Rust prevention hardware
<b>Packaging</b>	N/A
<b>Packaging</b>	N/A

# SP-VGL-166

## BULK WIRE

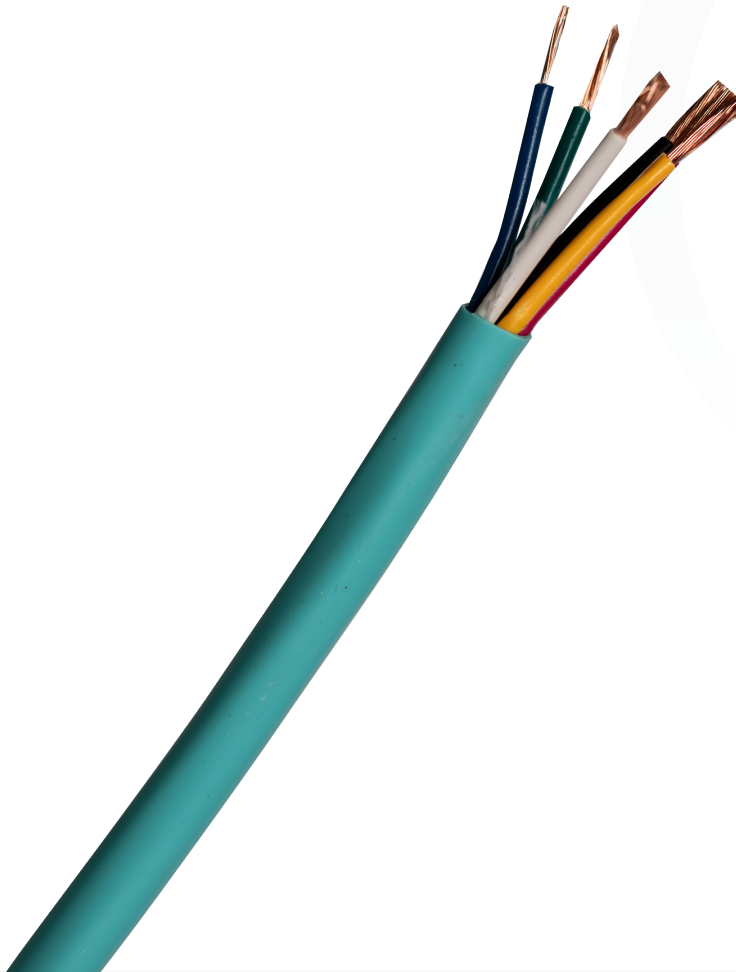

### Features:

- Compatible with Control4® Vibrant Linear Lighting
- Each color-coded jacket allows for easy troubleshooting and maintenance
- Available for pickup at Snap One Partner Stores
- All purchases eligible for Partner benefits

### Applicable Standards:

- UL Listed
- Temperature: -20°C to 75°C

	SP-VLG-166-1000
<b>Conductor Material</b>	Stranded Oxygen Free Bare Copper
<b>Wire Gauge</b>	16AWG
<b>Number of Conductors</b>	6
<b>Stranding</b>	65 Strands * 0.16mm diameter +/- .008
<b>Conductor Jacket Material</b>	PVC (Polyvinyl Chloride)
<b>Nominal Jacket Thickness (Conductors)</b>	0.55mm +/- 0.1 mm
<b>Outer Jacket Material</b>	
<b>Outer Jacket Thickness/ Diameter</b>	
<b>Outer Shield</b>	No
<b>Tape (Shield)</b>	No
<b>Drain Wire (Shield)</b>	No
<b>Rip Cord</b>	Yes
<b>Color</b>	"Interior Jacket Colors (Red, Black, Yellow, White, Blue, Green) Exterior Jacket Color (Vibrant Green/Blue #66D7D1) "
<b>Length</b>	1000ft
<b>Sealant</b>	N/A
<b>Sealant Temp</b>	N/A
<b>Compatibility</b>	
<b>Waterproof</b>	No
<b>Max Temp Rating</b>	75C
<b>Installation Temp.</b>	-30C to 60C
<b>Operating Temp</b>	-30C to 60C

	SP-VLG-166-1000
<b>Voltage</b>	600V Max (80V LV Nominal)
<b>Normal Conductor DCR</b>	x
<b>Normal Capacitance (Conductor to Conductor)</b>	x
<b>Normal Capacitance (Conductor to Other) [Conductors + Shield]</b>	x
<b>Normal Characteristic Impedence</b>	x
<b>High Frequency (Nominal/ Typical)</b>	x

	SP-VLG-166-1000
<b>Tier 1 and Tier 2 Certifications</b>	North America, Europe, New Zealand, Australia, APAC
<b>UL or ETL certification</b>	CL3/CM Rating, UL Listed, FT4 Rated, CPR
<b>IP Rating</b>	N
<b>RoHS 2 / 3</b>	Y
<b>Other Restricted Substances</b>	Y

	VLG-162
<b>Packaging</b>	Yes: Rust prevention hardware
<b>Packaging</b>	N/A
<b>Packaging</b>	N/A